

2/2 directional seat valve, direct operated with solenoid actuation

RE 18136-20/06.12 1/8
Replaces: 08.09

Type KSDE (high-performance)

Component size 1
Component series B
Maximum operating pressure 500 bar
Maximum flow 20 l/min



H6804

Table of contents

Contents	Page
Features	1
Ordering code	2
Valve types	2
Available coils	2
Function, section, symbols	3
Technical data	4
Voltage tolerance against ambient temperature	5
Characteristic curves	5
Performance limits	5
Unit dimensions	6
Mounting cavity	7
Available individual components	8

Features

- Mounting cavity R/T-13A
- Direct operated directional seat valve with solenoid actuation, tight on both sides
- Blocked connection tight in a leak-free form
- Safe switching also with longer standstill periods
- Wet-pin DC solenoids
- Rotatable solenoid coil

Information on available spare parts:
www.boschrexroth.com/spc

Ordering code (Valve without coil) ¹⁾

	KSDE	1	B / H	V	*																												
Directional seat valve, direct operated, electrically operated						Further details in the plain text																											
Maximum operating pressure 500 bar = U						no code = Standard																											
Maximum operating pressure 350 bar = R						-17 = Flow-optimized ³⁾																											
Component size = 1						Seal material																											
2 main ports						V = FKM seals (other seals upon request) Attention! Observe compatibility of seals with hydraulic fluid used!																											
Symbols	"R" (350 bar)	"U" (500 bar) "R... -17" (350 bar)				= N																											
	"R" (350 bar)	"U" (500 bar) "R... -17" (350 bar)				= P																											
						N0 = without manual override N9 = with concealed manual override N11 = with screwable manual override																											
						<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Version</th> <th colspan="3">Symbol N</th> <th colspan="3">Symbol P</th> </tr> <tr> <th>N0</th> <th>N9</th> <th>N11</th> <th>N0</th> <th>N9</th> <th>N11</th> </tr> </thead> <tbody> <tr> <td>R (350 bar)</td> <td>X</td> <td>-</td> <td>X</td> <td>X</td> <td>X ²⁾</td> <td>-</td> </tr> <tr> <td>U (500 bar)</td> <td>X</td> <td>-</td> <td>-</td> <td>X</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Version	Symbol N			Symbol P			N0	N9	N11	N0	N9	N11	R (350 bar)	X	-	X	X	X ²⁾	-	U (500 bar)	X	-	-	X	-	-
Version	Symbol N			Symbol P																													
	N0	N9	N11	N0	N9	N11																											
R (350 bar)	X	-	X	X	X ²⁾	-																											
U (500 bar)	X	-	-	X	-	-																											
						H = High-performance and mounting cavity R/T-13A (see page 7)																											
						B = Component series																											

Valve types (without coil) ¹⁾

Operating pressure 350 bar			Operating pressure 500 bar		
Spool symbol	Type	Material no.	Spool symbol	Type	Material no.
N	KSDER1NB/HN0V	R901083194	N	KSDEU1NB/HN0V	R901083202
	KSDER1NB/HN0V-17	R901176259		P	KSDEU1PB/HN0V
	KSDER1NB/HN11V	R901151293			
	KSDER1NB/HN11V-17	R901206914			
P	KSDER1PB/HN0V	R901083196			
	KSDER1PB/HN0V-17	R901176247			
	KSDER1PB/HN9V	R901151294			
	KSDER1PB/HN9V-17	R901206911			

Available coils (separate order) ¹⁾

Direct voltage DC ⁵⁾	Material no. for coil with connector ⁴⁾		
	"K4"	"K40"	"C4"
12 V	03pol (2+PE) DIN EN 175301-803 R900991678	02pol K40 DT 04-2PA, make: Deutsch R900729189	02pol C4/Z30 AMP Junior Timer R900315818
24 V	R900991121	R900729190	R900315819

- ¹⁾ Complete valves with mounted coil upon request
- ²⁾ Screwable manual override "N10" (actuation by means of internal hexagon with lock nut), possible as separate order, material no. **R901051231**; ordering code "**N9**"!
- ³⁾ Only version "R" (free-flowing on one side!)
- ⁴⁾ Mating connectors (separate order), see RE 08006
- ⁵⁾ Other voltages upon request

Function, section, symbols

General

The 2/2 directional seat valves are direct operated, pressure compensated cartridge valves. They basically comprises of screw-in section (4) with valve seat (1), solenoid (5), as well as closing element (3) and compression spring (2).

Function



The initial position of the valve (normally open "P" or normally closed "N") is determined by the position of the closing element (3) and the arrangement of the compression spring (2). Due to the structural design, the 2/2 directional seat valves are always pressure-compensated in relation to the actuating forces. The main ports ① and ② can be loaded with an operating pressure of 350 bar/500 bar (see Technical Data, page 4).

Attention!


The flow is only permitted in the direction of arrow (see symbols)! With version "U" (operating pressure 500 bar) as well as with version "R...-17", main port ① must be connected with pump connection P! Valves with version "R...-17" are flow-optimized and thus achieve a higher pressure differential.

With symbol "P", the closing element (3) is pressed onto the seat by the solenoid (5), with symbol "N" by the compression spring (2). The flow is blocked in a leak-free form.


The manual override allows for the the switching of the valve without solenoid energization. It is available in concealed version "N9" (6) or in screwable version "N11" (7) (see page 2).

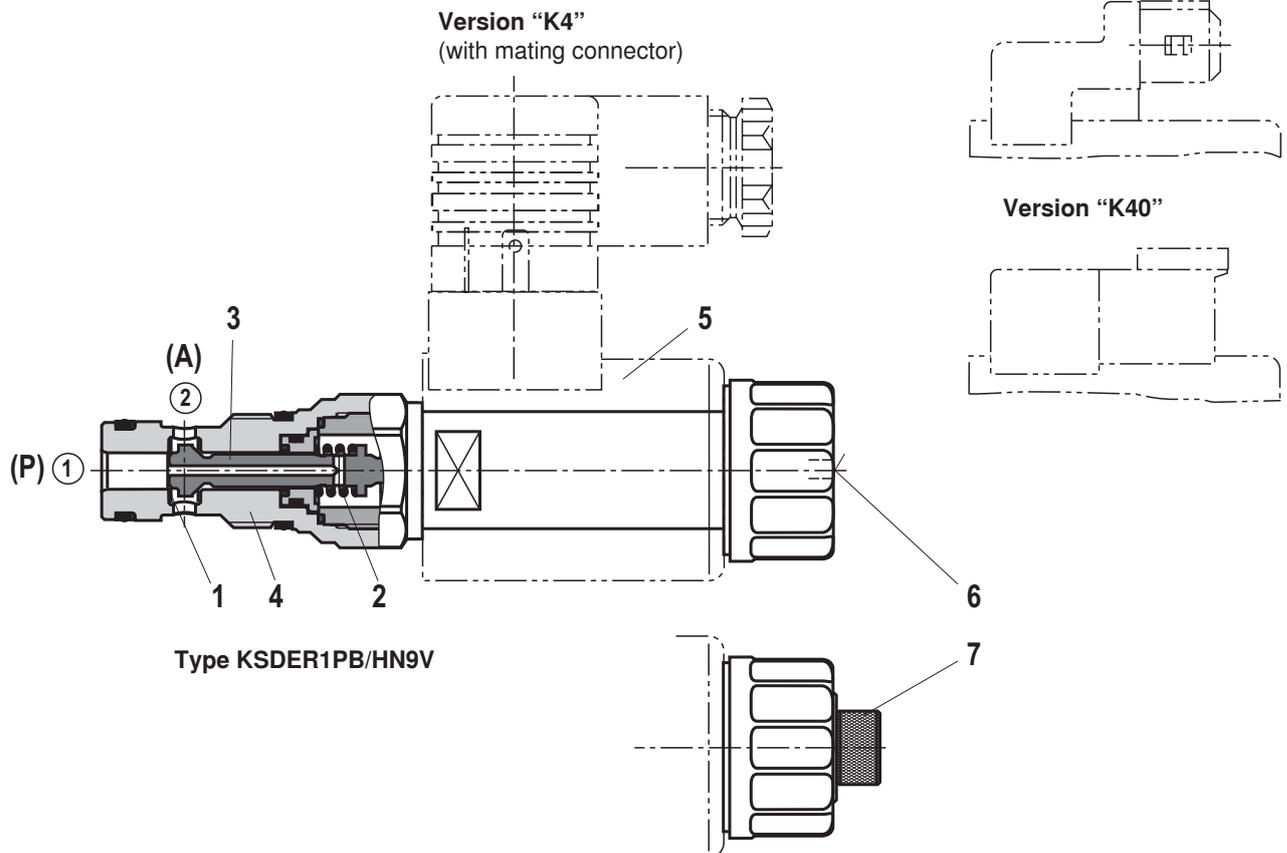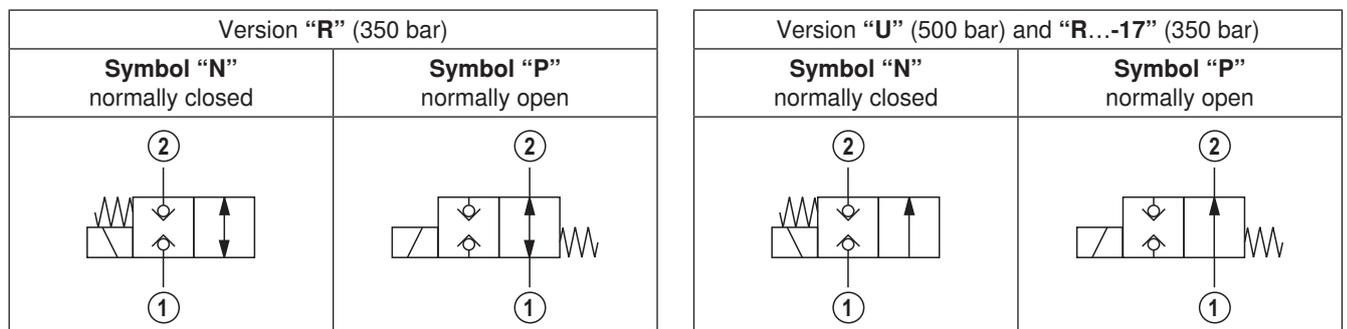

Version "C4"



Version "K40"



Technical data (For applications outside these parameters, please consult us!)**general**

Weight	- Valve	kg	0.30
	- Coil	kg	0.25
Installation position			Any
Ambient temperature range			°C -40 to +110

hydraulic

Maximum operating pressure	- Version "U"	bar	500 (at all ports if $P \geq A$; for design reasons)
	- Version "R"	bar	350 (at all ports)
	- Version "R...-17"	bar	350 (at all ports if $P \geq A$; for design reasons)
Maximum flow	- Version "U"	l/min	12 (see performance limits page 5)
	- Version "R"	l/min	20 (see performance limits page 5)
Hydraulic fluid			Mineral oil (HL, HLP) according to DIN 51524; quickly bio-degradable hydraulic fluids according to VDMA 24568 (see also RE 90221); HETG (rape seed oil); HEPG (polyglycols); HEES (synthetic esters); other hydraulic fluids upon request
Hydraulic fluid temperature range			°C -40 to +80
Viscosity range			mm ² /s 4 to 500
Maximum permitted degree of contamination of the hydraulic fluid – cleanliness class according to ISO 4406 (c)			Class 20/18/15 ¹⁾
Load cycles	- Version "R" (350 bar)		10 million
	- Version "U" (500 bar)		5 million

electrical

Type of voltage		Direct voltage	
Supply voltage ²⁾		V	12 DC; 24 DC
Voltage tolerance against ambient temperature		See characteristic curve page 5	
Power consumption		W	22
Duty cycle		%	See characteristic curve page 5
Maximum coil temperature ³⁾		°C	150
Switching time according to ISO 6403 (solenoid horizontal)	- ON (① → ②)	ms	≤ 60 (≤ 95 with version "R...-17")
	- OFF (② → ①)	ms	≤ 60 (≤ 95 with version "R...-17")
Maximum switching frequency	- Version "R"	1/h	9000
	- Version "U"	1/h	3600
Protection class according to VDE 0470-1 (DIN EN 60529) DIN 40050-9	- Version "K4"	IP 65 with mating connector mounted and locked	
	- Version "C4"	IP 66 with mating connector mounted and locked	
		IP 69K with Rexroth mating connector (Material no. R901022127)	
	- Version "K40"	IP 69K with mating connector mounted and locked	

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the service life of the components.


For the selection of filters, see data sheets RE 50070, RE 50076, RE 50081, RE 50086, RE 50087 and RE 50088.

²⁾ Other voltages upon request


³⁾ Due to the temperatures occurring at the surfaces of the solenoid coils, the standards ISO 13732-1 and EN 982 need to be adhered to!

At the electrical connection "K4", the protective earthing conductor (PE $\frac{1}{2}$) has to be connected properly.

Voltage tolerance against ambient temperature; duty cycle

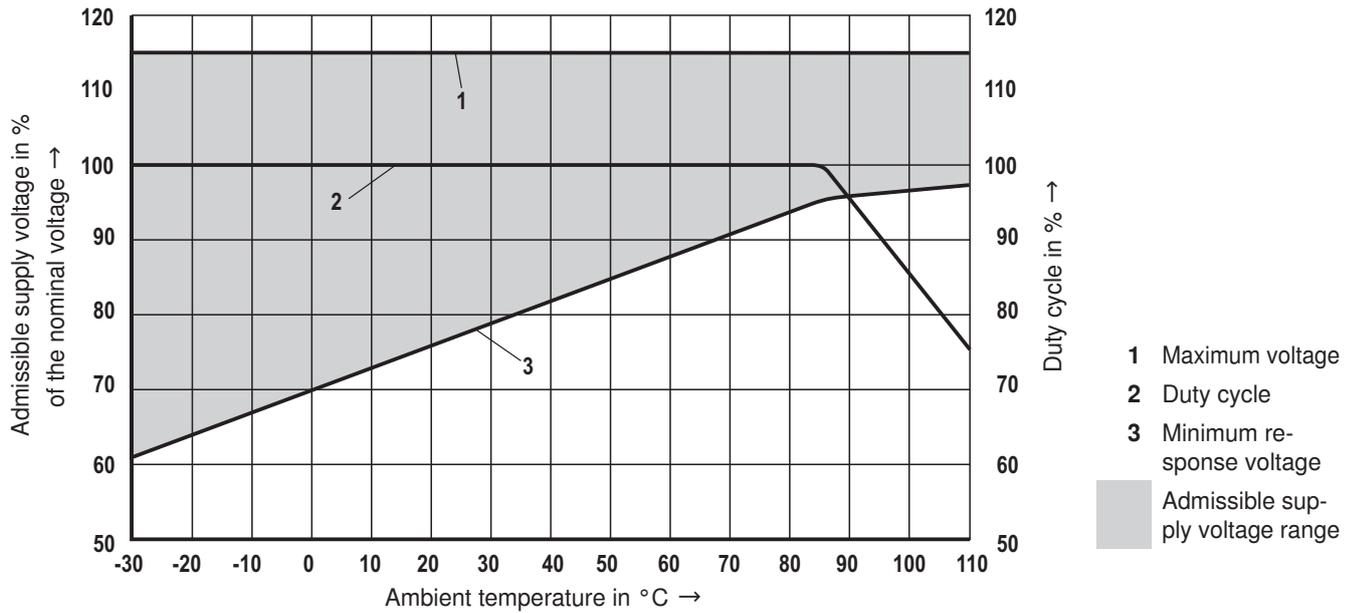






Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ and 24 V coil)

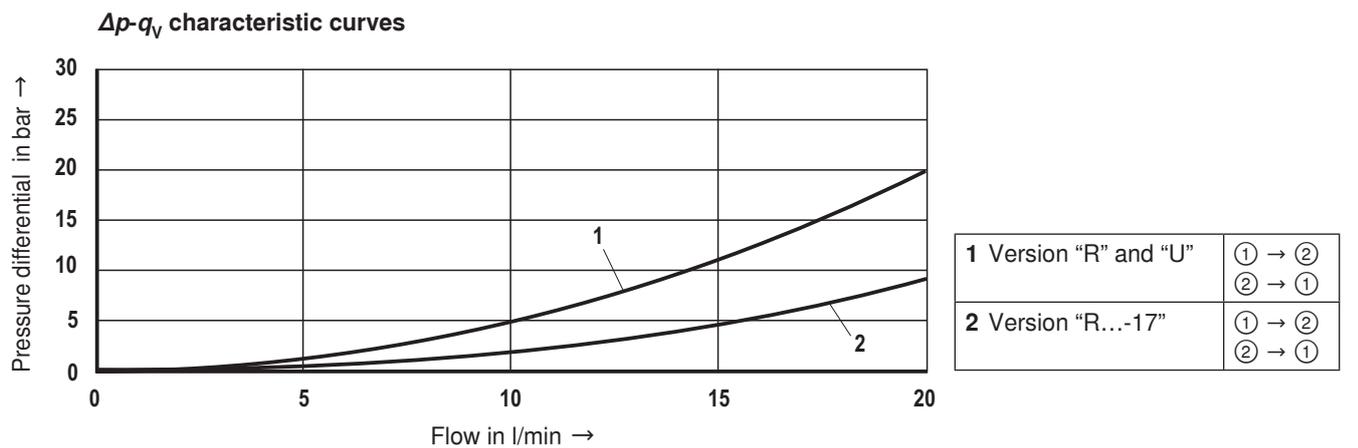

Performance limits (measured with HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$ and 24 V coil)



Unit dimensions (dimensions in mm)

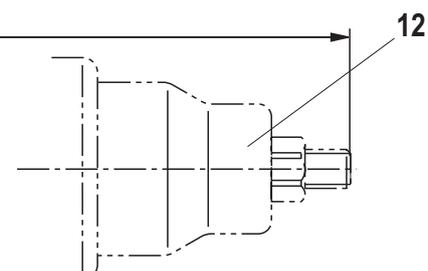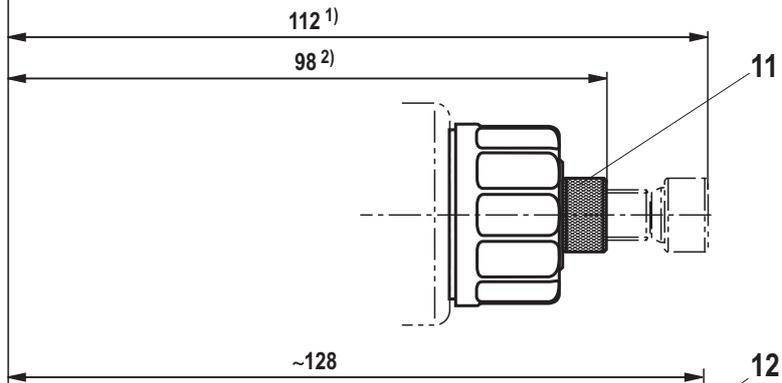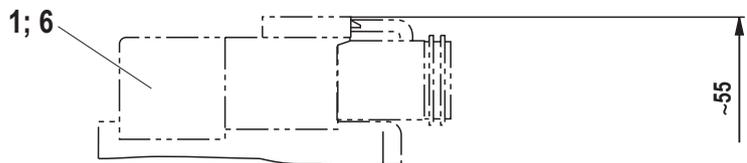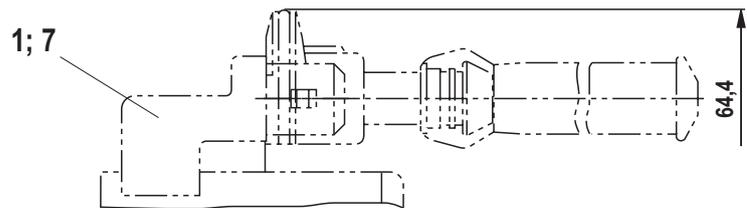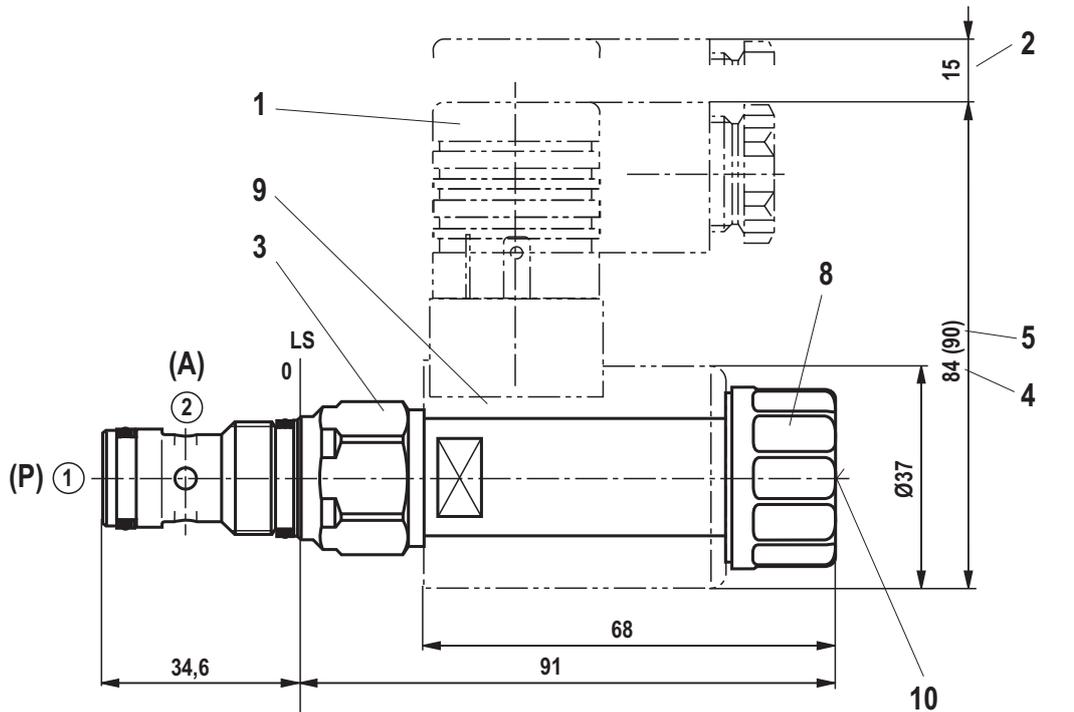


- 1 Mating connector (separate order, see RE 08006)
- 2 Space required to remove the mating connector
- 3 SW24, tightening torque $M_A = 60^{+5}$ Nm
- 4 Dimension for "K4" mating connector, without circuitry
- 5 Dimension () for "K4" mating connector, with circuitry
- 6 Version "K40"
- 7 Version "C4"
- 8 Nut, tightening torque $M_A = 5^{+1}$ Nm
- 9 Coil (separate order, see page 2)
- 10 Concealed manual override "N9", optional
- 11 Screwable manual override "N11", optional
- 12 Screwable manual override "N10" (separate order, see page 2)

① = Main port 1, pump P³⁾
 ② = Main port 2, actuator A³⁾
 LS = Positive stop shoulder (location shoulder)

1) Actuated
 2) Screwed in
 3) **Attention!**
 Unambiguous pinout. P and A must not be exchanged or closed!

Available individual components

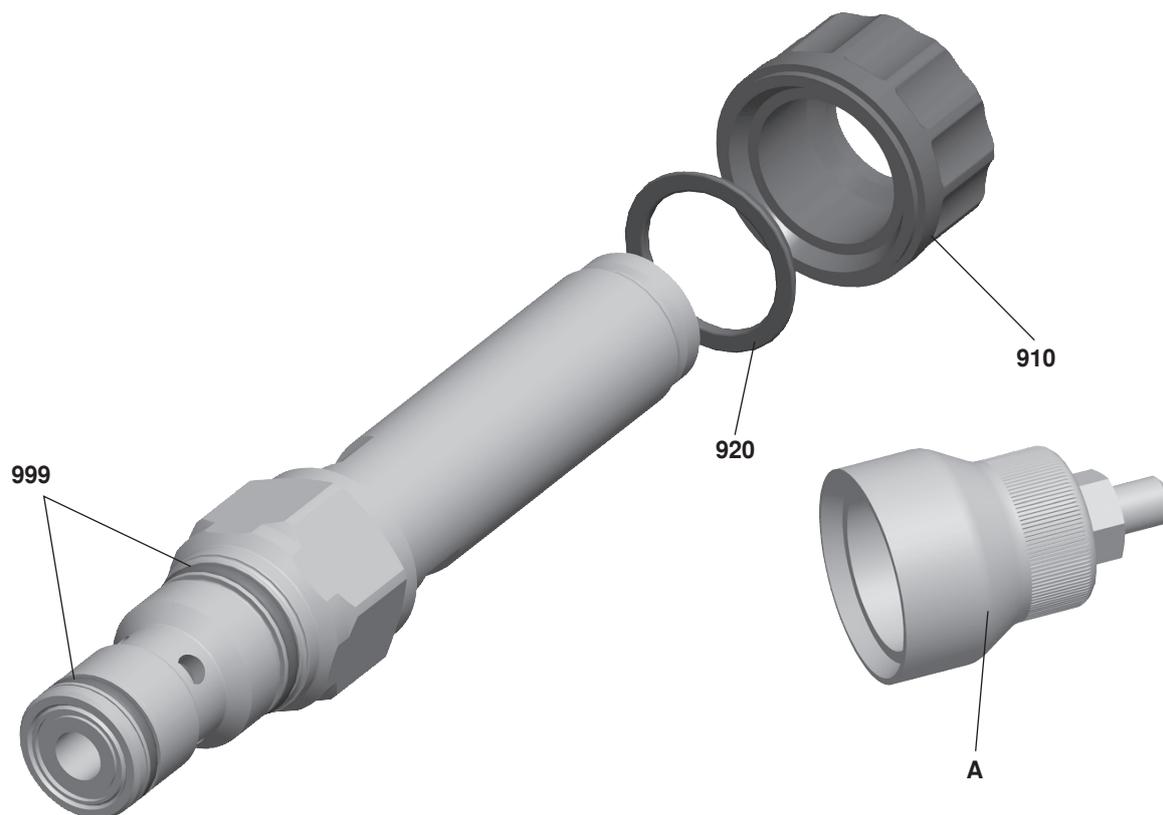

Item	Description	Material no.
910	Nut	R900991453
920	O-ring for pole tube	R900004280
999	Seal kit of the valve	R961003236
A	Manual override "N10" ¹⁾	R901051231

Coils, separate order, see page 2

¹⁾ Only with ordering code "N9", see page 2