
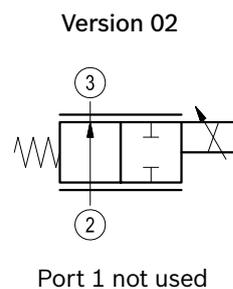


Proportional valves not compensated flow regulator

Common cavity, Size 10

VEP-5A-2Q-09

OD.92.02.77 - Y - Z

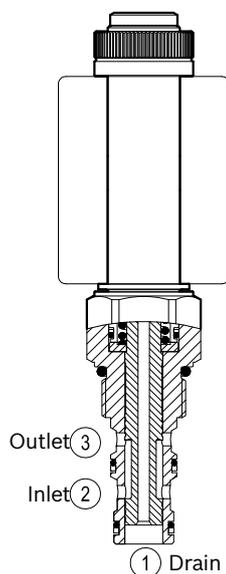

General

Weight	kg (lbs)	0.32 (0.71)
Installation orientation		Optional
Ambient temperature range	°C (°F)	-30 to 60 (-22 to 140)
Salt spray test to DIN EN ISO 9227:2017-07		500h

Hydraulic

Max. operating pressure	bar (psi)	210 (3000)
Flow range	l/min.(gpm)	See flow diagram
Max. internal leakage (*)	cm ³ /min. (cu.in./min.)	100 (6)
Fluid temperature range	°C (°F)	-20 to 80 (-4 to 176)
Fluids		Mineral-based or synthetics with lubricating properties at viscosities of 15 to 380 mm ² /s (cSt)
Installation torque	Nm (ft-lbs)	44-56 (33-41)
Recommended degree of fluid contamination		Nominal value max. 10µm (NAS 8) ISO 4406 19/17/14
Cavity		CA-10A-3N see RE 18325-70
Lines bodies and standard assemblies		Please refer to section "Hydraulic integrated circuit" or consult factory
Seal kit	code material no.	RG10A3010520100 R901111369
Seal kit coil	code material no.	RG19A1PNBR7010 R934003964
Other technical data		See data sheet RE 18350-50


(*) Measured at 210 bar (3000 psi). Oil at 46 cSt.

Electrical

Type of voltage	DC voltage
Coil type	S5
Supply voltage	12 DC
Nominal voltage	± 10%
Power consumption	W 23
Duty cycle	% 100
Type of protection	See data sheet RE 18325-90

Dimensions

Proportional valves not compensated flow regulator


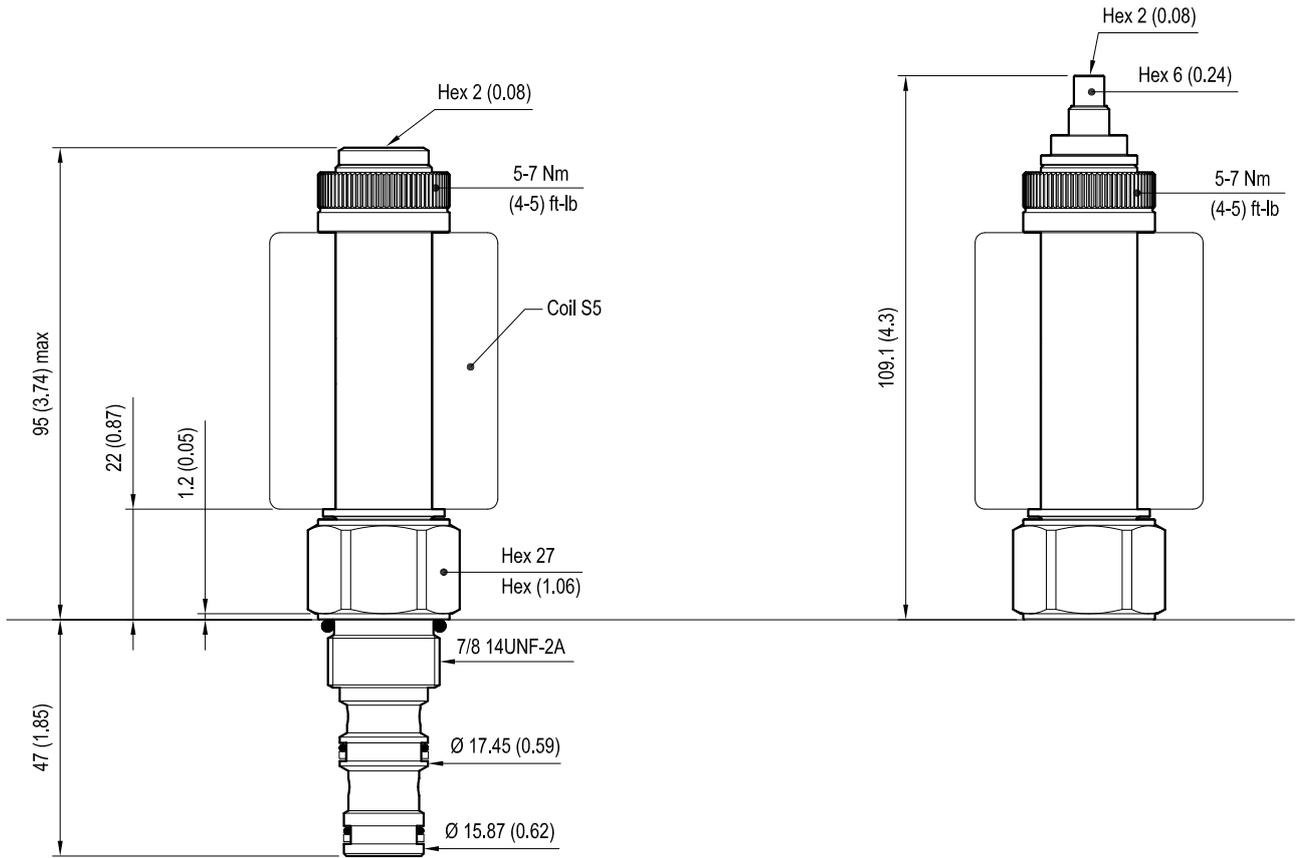


PORT NOT USED



mm (Inches)

Performance graphs



Z= 01

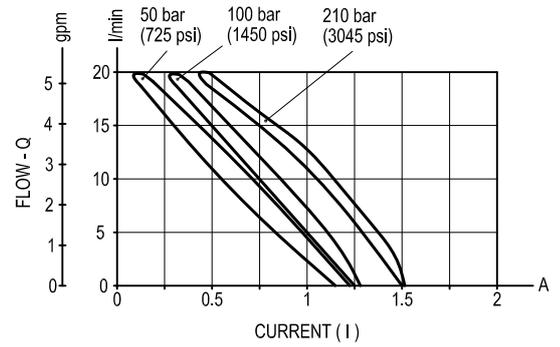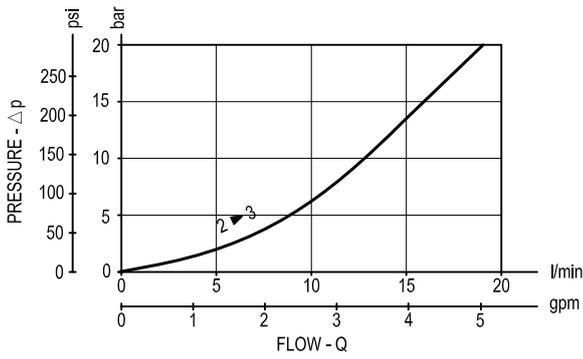

Z= 02

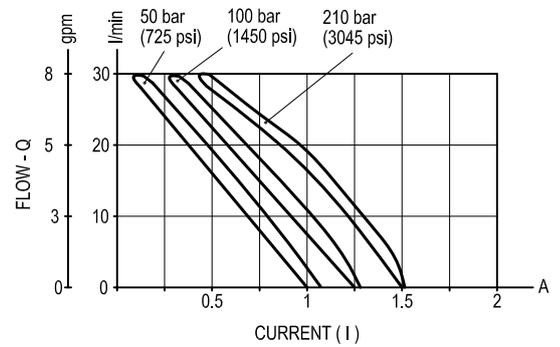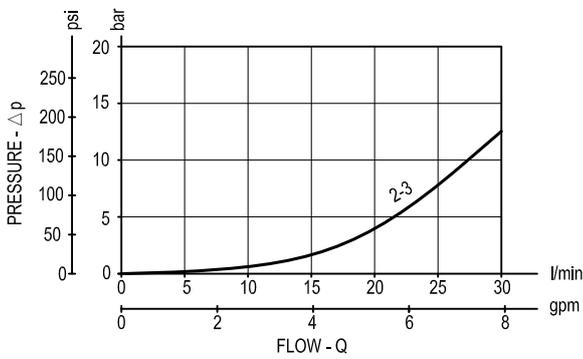


Z= 03

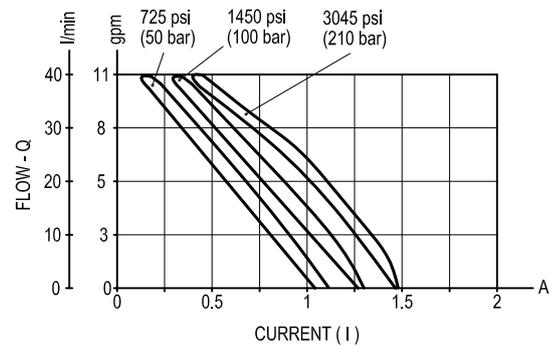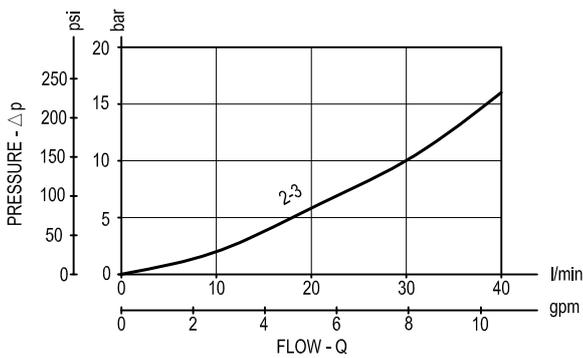

PMW Frequency: 120-150 Hz
Hysteresis: < 5%

Note (1): It is recommended to use coil 12 DC.
 Note (2): Performance using coil without diode.

Ordering code

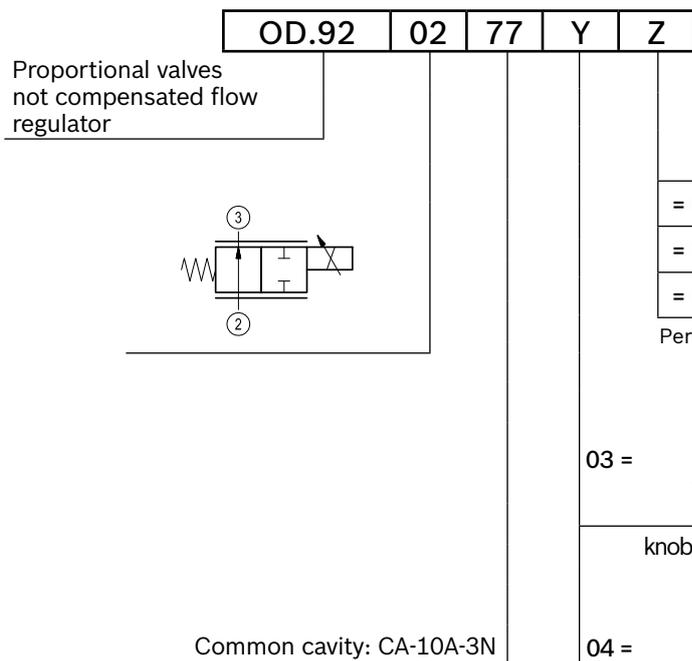


	Operating range		
	Rated flow max l/min (gpm)	I Min. A (±15%)	I Max. A (±15%)
= 01	20 (6)	0.4	1.4
= 02	30 (8)	0.4	1.4
= 03	40 (11)	0.3	1.4

Performance using coil without diode.


standard type

03 =



knob style manual override

04 =



Type	Material number
OD920277030100	R934001510
OD920277030200	R934001511
OD920277030300	R934003129
OD920277040100	R934003908
OD920277040200	R934001512
OD920277040300	R934001513

Type	Material number